




Control Stat 40 - 210 °C 1M capillary SPDT thermostat

Adjustable temperature 40/210
°C 1 metre capillary SPDT (single
pole double throw)

Panel mounting, liquid filled
capillary and sensing element.
(not including knob/bezels)

TR2 is a liquid expansion
capillary thermostat, unipolar,
with changeover switches,
particularly suitable for
automatic temperature
regulation for appliances in the
field of civil and industrial
heating, air conditioning and
household appliances such as
boilers, washing machines,
dishwashers.

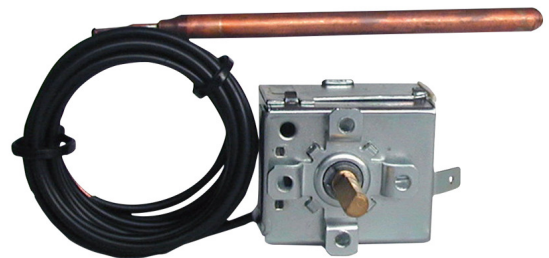

37a Villa Wood Road, Dromore, Co Down. Northern Ireland

T: 0044 2892699200 f: 0044 2892692745

w. spatec.co.uk

e: info@spatec.co.uk