

Zip AQ4 Unvented Kit

Consisting of:

Thermostatic blending valve complete with 2 check valves. (Set temp range 30 ° to 65 °C).

AQ4S TMV3


NHS approved thermostatic blending valve complete with 2 check valves (set to temp range 30 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}).$

These blending valves provide over temperature protection and are also ideal for extending system capacity.



Unvented Accessory Selection

Will the pipework accommodate expanded water without hot water entering any supply pipe connected to a cold water draw-off? (See diagram A opposite and note minimum pipe lengths). If expansion in the cold water main is restricted, e.g. by a valve or meter, an expansion vessel and other relevant accessories MUST be fitted.

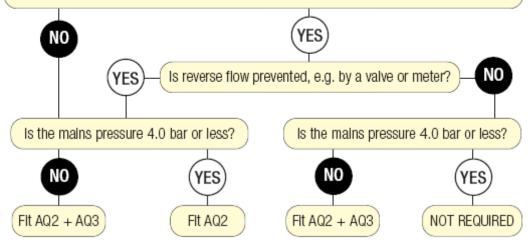

w: www.spatec.co.uk e: info@spatec.co.uk

VAT REG NO: 434161673 N.I. REG NO. 19716