

Zip HydroTap G4 Boiling only, Filtered

Zip HydroTap G4 Boiling | Filtered | Instantly Commercial models B160G4, B240G4



With new Zip G4 power-saving technology and Zip 0.2 micron filtration.

Simple to install on any kitchen sink.

Boiling filtered water instantly from a space-saving compact Command Centre.

Adjustable boiling water temperature: 100°C to 68°C.

Power-Pulse™ electronic technology controls the set boiling water temperature within 0.2°C.

Choice of fingertip control for fast cup filling (lever down) or **hands-free** pot filling (lever up).

Two safety modes. Can be set to require finger-thumb operation for boiling water access, eliminating the risk of accidental use. Can also be set to **“hot isolation mode”** for added safety.

Low-energy lights signal when boiling water is ready, or filter change is due.

Hidden light sensor sends appliance to sleep to conserve energy whenever the room goes dark.

Sleeps at 64°C or powers OFF after 2 hours of non-use.

Plus inbuilt 24/7 on/off timing allowing power to be turned off for weekday or weekend periods.

Zip 0.2 micron filter puts crystal-clear, better-tasting water on tap, filtering out chlorine taste and odour, lead, and impurities as tiny as one five-thousandth of a millimetre, including protozoan cysts such as Cryptosporidium but does not remove beneficial fluoride.

New under-sink Zip Command Centre™ leads the world in time-saving and energy-saving technology, reducing standby energy consumption substantially over earlier models of similar capacity.

Typical Specification

“Under-sink boiling filtered water appliance equipped with integral 5 bar pressure limiting and dual check valve, 0.2 micron water filter, an interactive touch screen display with password protection and two boiling-water safety modes.”

Can be installed away from any sink with the optional ZT008 ‘font’ kit accessory.

Zip HydroTap Commercial models with new Zip G4 power-saving technology.

Zip Model	Boiling Cups/hr	Rating (kW) @ 230 V	Cabinet Dimensions W x D x H (mm)
B160G4	160	1.85	280 x 313 x 335
B240G4	240	1.85 + 2.2 (b)	280 x 313 x 335

Standard Cup = 167 ml. (a) Order codes shown here are for boiling water tap installed on a sink. To install boiling water tap on a ‘font’ also specify a font kit: order code ZT008. (b) Model B240G4 is installed with an externally mounted 2.2kW booster unit and must be connected to two separate 13 amp fused spurs.

Boiling System

Open outlet, vented system, factory set to operate at 98°C. Flow rate 4.0 l/min.

Location

Tap should be positioned so it drains into a suitable sink. Alternatively tap can be installed away from any sink on it’s own ‘font’. Tap should be situated as closely as possible to directly above the under-sink

Command Centre. Maximum distance from the base of the tap to the Command Centre is one metre. Command Centre must have clearances as shown on the drawings.

Plumbing

Must be installed in accordance with UK Water Supply Regulations.

Designed for direct connection to a potable (drinkable) cold water supply with a minimum pressure of 0.7 bar (1.7 bar If fitted with booster unit or scale filtration). A 5 bar pressure limiting valve is fitted internally. An isolating valve should be installed between the water supply and the Command Centre.

Electrical

Installation must comply with current IEE regulations.

Model 160 to be wired to a double pole 13 amp fused spur.

Model 240 is installed with an externally mounted 2.2kW booster unit and must be connected to two separate double pole 13 amp fused spurs.

Caution

In hard water areas where mineral scale accumulation may be an issue, consideration should be given to the maintenance required.

We recommend use of the Zip Professional high performance limescale filtration system.

Accessories

ZT008 – Zip G4 font installation kit. ZT402 – Zip 0.2 micron replacement filter.


To order any model to be supplied with extension levers and Braille pads, add D to the end of the Order Code.

Approvals

CE endorsed

Five Year Warranty

Appliance warranty 24 months, plus additional 36 months tank warranty. See website for details.

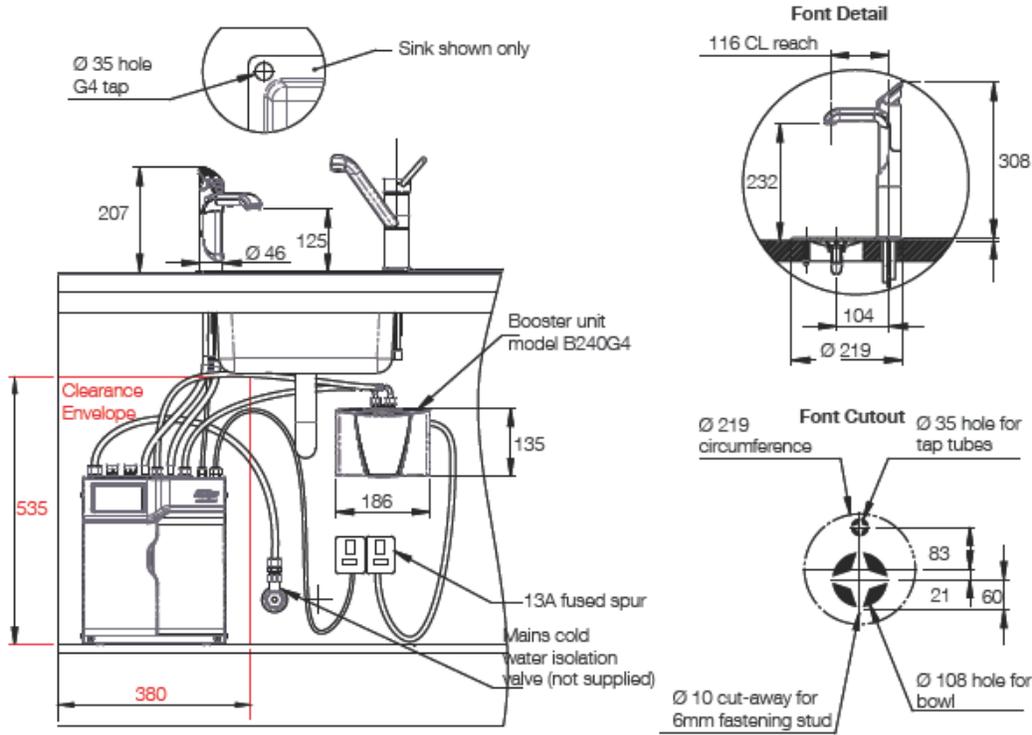

Dimensions in mm

Zip Specification Sheet Z0542 - April 2014

As Zip policy is one of continuous product improvement changes to specifications may be made without prior notice. The terms 'Zip', 'Power-Pulse', 'HydroTap' and 'Command Centre' are trade marks.

37A Villa Wood Road
 Dromore
 Co Down
 N Ireland
 Northern Ireland
 BT25 1LG
 t: 028 92 699200
 f: 028 92 692745

www.spatec.co.uk
 e: info@spatec.co.uk.com