

Spec sheet

# Zip Econoboil

It's water. Refreshed.

Instant on-wall boiling water

Updated design for 2019, the Econoboil range employs patented twin chamber boiling water steam-heat-boost™ technology to recycle energy from steam to pre-heat the incoming cold water. Also features thermostatic temperature control and is equipped with an external two-way classic tap.



New Product code	Old Product code	Tank size (litres)	*Cups at one time	Heat up time (Inlet 15°C)	Heat up time (Inlet 10°C)	Rated voltage and power	Dimensions (mm) W x D x H	Filled weight(Kg)
303542	HS503	3.0	18	16mins	17mins	220-240V, 50Hz, 1400W	289 x 180 x 431	12.5
305542	HS505	5.0	30	16mins	17mins	220-240V, 50Hz, 2200W	318 x 198 x 465	16.5

\*Standard cup size 167ml

## FEATURES & BENEFITS

### DELIVERY RATE

Up to 30 cups at a time.

### RECOVERY RATE

Up to 140 cups/hour.

### INSTANT

Boiling water instantly for tea, coffee, cooking.

### OPERATION

Designed to operate within 1°C of boiling point.

### TECHNOLOGY

Patented Twin chamber, Steam-Heat-Boost technology.

### TANK

Crevice free, stainless steel boiling tank, with top and bottom access ports.

### TAP

Pull down classic tap for precision filling of cups, locks 'ON' for filling pots.

### CASE

White enamelled steel case.

### ELEMENT

Long life incolloy sheathed, embedded rod type element.

## SPECIFICATION TYPE

Instant boiling water heater	Twin chamber
Stainless steel boiling chamber	Service access ports top & bottom
Insulation	Tontine
Element	Incoloy sheathed embedded rod
Thermostat	Capillary type

## CAPACITY

Capacity	Model range 3L, 5L
----------	--------------------

## ELECTRICAL

Voltage supply	220 - 240V AC 50Hz
Power supply	1 x 13 amp double pole isolation switch or socket outlet
Installation	Must comply with current IEE regulations

## PLUMBING

Wholesome cold water inlet supply required	Yes
Supply pressure range	0.07 MPa (0.7 bar) - 0.5 (5 bar)
Inlet pipe	15mm connections
Vent pipe	15mm connections
Vent discharge	Visible tundish or drainage board
Installation	Must comply with current water supply regulations

## WARRANTY

2 years on-site parts and labour on site	Terms and conditions apply (see supplied manual)
--	--

## HYDROCARE PACKAGES AVAILABLE

Commercial - Yearly Plan	Full breakdown cover including parts and labour Comprehensive preventative maintenance cover
--------------------------	---

## ACCESSORIES

ZD200 Drip Tray	340mm x 190mm x 20mm, 19.5mm drainage access.
FL064 Inline filter	For scale , taste & odour, up to 7.5Litre models
FL104 Inline filter	For scale , taste & odour, above 7.5Litre models
ZE001 Cup dispenser	Stainless steel
ZE002 Cup dispenser	White plastic


**37a Villa Wood Road, Dromore, County Down N Ireland BT25 1LG**

**[www.spatec.co.uk](http://www.spatec.co.uk) [info@spatec.co.uk](mailto:info@spatec.co.uk)**

**t: 0044 (0) 28 9269 9200 f: 0044 (0) 28 9269 2745**

**DRAWINGS** (see table on front page for dimensions)

All dimensions in mm

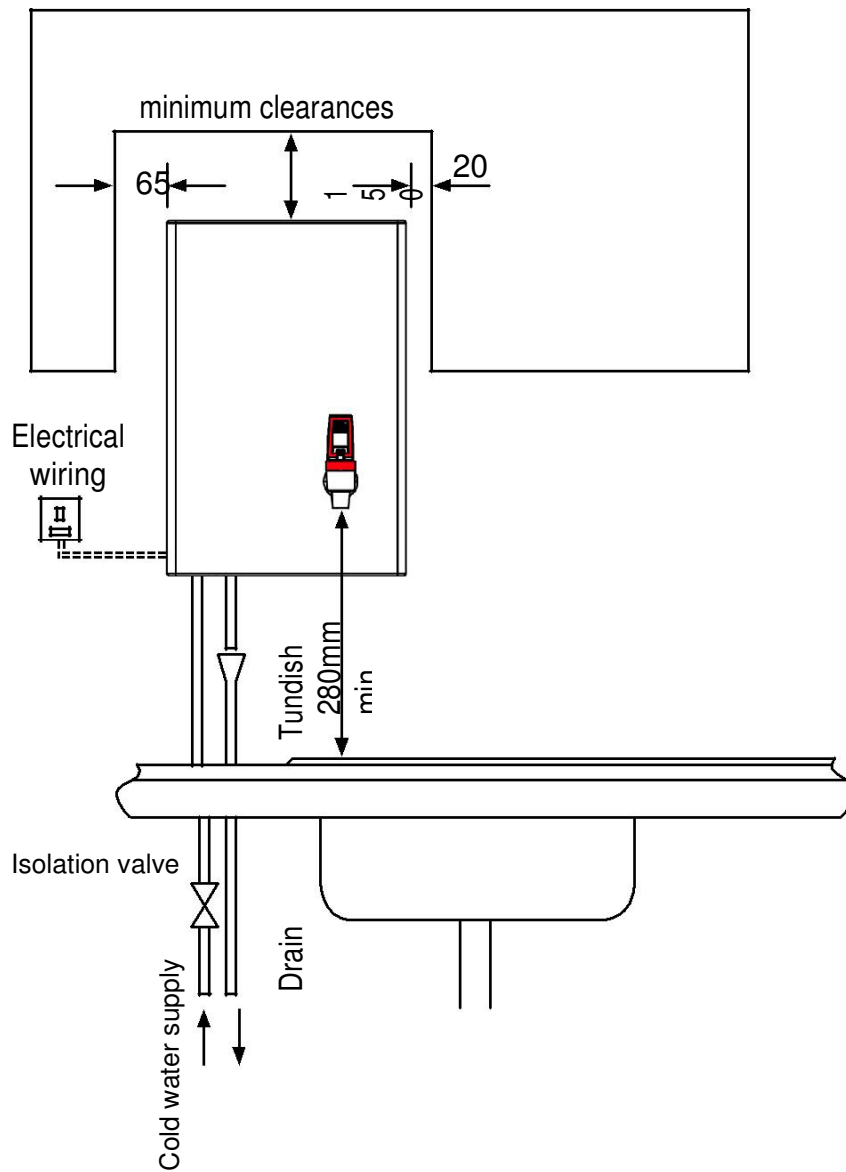

**37a Villa Wood Road, Dromore, County Down N Ireland BT25 1LG**  
**[www.spatec.co.uk](http://www.spatec.co.uk) [info@spatec.co.uk](mailto:info@spatec.co.uk)**  
**t: 0044 (0) 28 9269 9200 f: 0044 (0) 28 9269 2745**