

Spec sheet

Zip Hydroboil Plus

Instant on-wall boiling water

The recently redesigned Zip Hydroboil Plus range, delivers boiling water instantly from a reliable, wall-mounted unit. As well as saving time, the Hydroboil Plus saves businesses energy and money too. Costing little to run, energy efficient design and electronic controls minimise power consumption, while simple-to-use fingertip control brings you a cup-full or teapot-full of boiling water at a time.

With all the benefits of the Hydroboil, the Hydroboil Plus also features energy-saving Power-Pulse™ technology, inactivity and low light sleep modes and is equipped with a two-way safety tap and safety lock.



| ew Product code | Old Product code | Tank size (litres) | *Cups at one time | Heat up time (Inlet 15°C) | Heat up time (Inlet 10°C) | Rated voltage and power | Dimensions (mm) W x D x H | Filled weight(Kg) |
|-----------------|------------------|--------------------|-------------------|---------------------------|---------------------------|-------------------------|---------------------------|-------------------|
| 303562 | HP003 | 3.0 | 18 | 16mins | 17mins | 220-240V, 50Hz, 1500W | 289 x 180 x 431 | 12.5 |
| 305562 | HP005 | 5.0 | 30 | 16mins | 17mins | 220-240V, 50Hz, 2400W | 318 x 198 x 465 | 16.5 |
| 307562 | HS007 | 7.5 | 45 | 23mins | 24mins | 220-240V, 50Hz, 2400W | 318 x 198 x 578 | 20.5 |

*Standard cup size 167ml

FEATURES & BENEFITS

DELIVERY RATE

Up to 240 cups at a time.

RECOVERY RATE

Up to 360 cups/hour.

INSTANT

Boiling water instantly for tea, coffee, cooking.

OPERATION

Designed to operate within 1°C of boiling point.

TECHNOLOGY

Patented Twin chamber, Steam-Heat-Boost technology.

TANK

Crevice free, stainless steel boiling tank, with top and bottom access ports.

TAP

Unique two-way cool touch tap with safety lock.

CASE

White enamelled steel case.

ELEMENT

Long life incolloy sheathed, embedded rod type element.

SLEEP MODES

Inactivity and low light.

TIMER

Integral 24/7 timer.

SPECIFICATION TYPE

| | |
|---------------------------------|-----------------------------------|
| Instant boiling water heater | Twin chamber |
| Stainless steel boiling chamber | Service access ports top & bottom |
| Control | Electronic |
| Element | Incoloy sheathed embedded rod |
| Thermostat | Capillary type |

CAPACITY

| | |
|----------|--------------------------|
| Capacity | Model range 3L, 5L, 7.5L |
|----------|--------------------------|

ELECTRICAL

| | |
|----------------|--|
| Voltage supply | 220 - 240V AC 50Hz |
| Power supply | 1 x 13 amp double pole isolation switch or socket outlet |
| Installation | Must comply with current IEE regulations |

PLUMBING

| | |
|--|---|
| Wholesome cold water inlet supply required | Yes |
| Supply pressure range | 0.07 MPa (0.7 bar) - 0.5 (5 bar) |
| Inlet pipe | 15mm connections |
| Vent pipe | 15mm connections |
| Vent discharge | Visible tundish or drainage board |
| Installation | Must comply with current water supply regulations |

WARRANTY

| | |
|--|--|
| 2 years on-site parts and labour on site | Terms and conditions apply (see supplied manual) |
|--|--|

HYDROCARE PACKAGES AVAILABLE

| | |
|--------------------------|---|
| Commercial - Yearly Plan | Full breakdown cover including parts and labour Comprehensive preventative maintenance cover |
|--------------------------|---|

ACCESSORIES


| | |
|---------------------|--|
| ZD200 Drip Tray | 340mm x 190mm x 20mm, 19.5mm drainage access. |
| FL064 Inline filter | For scale , taste & odour, up to 7.5Litre models |
| FL104 Inline filter | For scale , taste & odour, above 7.5Litre models |
| ZE001 Cup dispenser | Stainless steel |
| ZE002 Cup dispenser | White plastic |

37a Villa Wood Road, Dromore, County Down N Ireland BT25 1LG

www.spatec.co.uk info@spatec.co.uk

t: 0044 (0) 28 9269 9200 f: 0044 (0) 28 9269 2745

All dimensions in mm

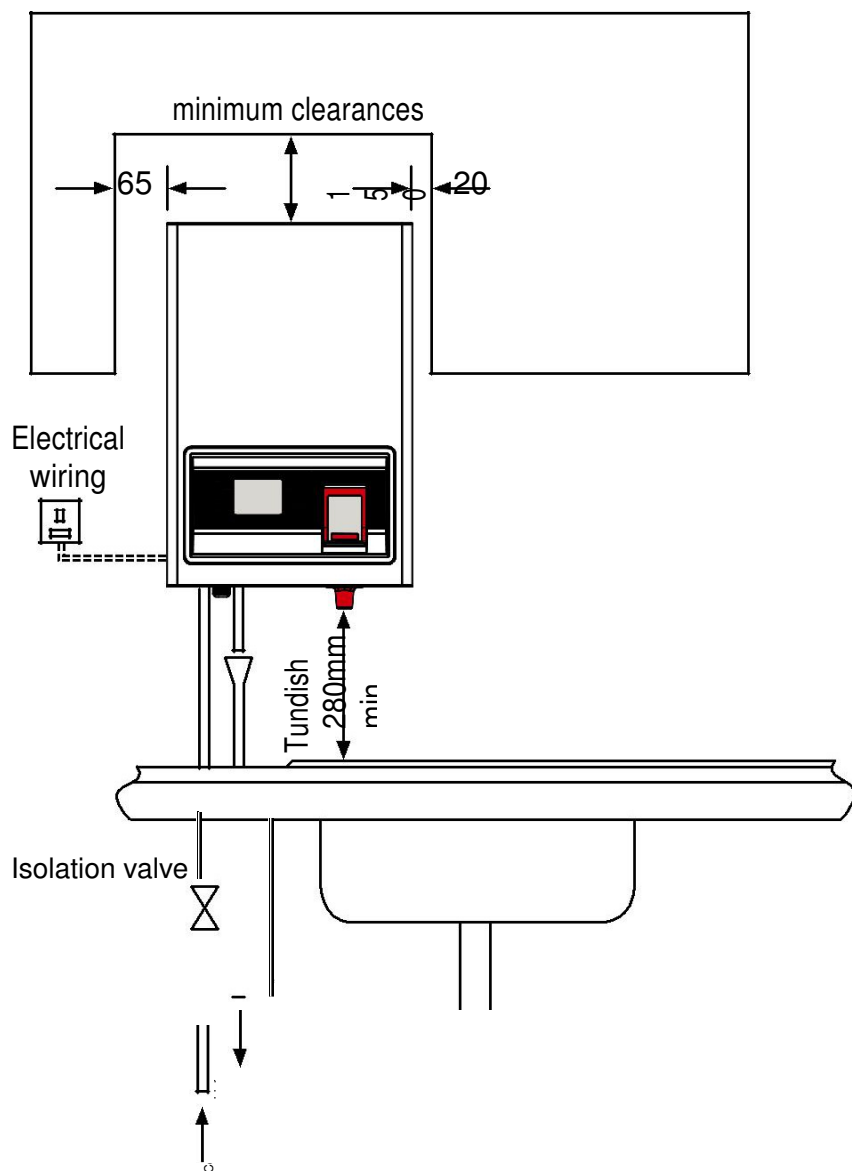

37a Villa Wood Road, Dromore, County Down N Ireland BT25 1LG
www.spatec.co.uk info@spatec.co.uk
t: 0044 (0) 28 9269 9200 f: 0044 (0) 28 9269 2745