shower controls - Time Flow Shower Controls

Introduction

Water conservation is essential and in some public establishments where multiple water outlets are used, the Inta range of Time Flow Control systems are an eco-friendly, stylish and economical solution to the problem of water wastage. All of the Inta Time Flow Controls are designed to work with the Intamix range of the Thermostatic Mixing Valves

Time Flow Shower
Exposed
TF997CP

- Simple operation
- Closes automatically Water economy
- Non concussive operation
- Operating pressure range of 0.1 to 5 bar
- Exposed, Concealed and Cross-wall options available

Time Flow
Shower
Concealed
TF997CP

Product Range

Description	Code
Time Flow Shower Control - Exposed	TF992CP
Time Flow Shower Control - Concealed	TF997CP
Time Flow Shower Control - Concealed 30 second delay	TF997CP

shower controls - Time Flow Shower Controls

Features

Technical Specification

Max Inlet Pressure	10 Bar (static)
Min Inlet Pressure	0.1 Bar (dynamic)
Max Inlet Temperature	65°C
Timed flow (standard)	15 seconds at 1 bar

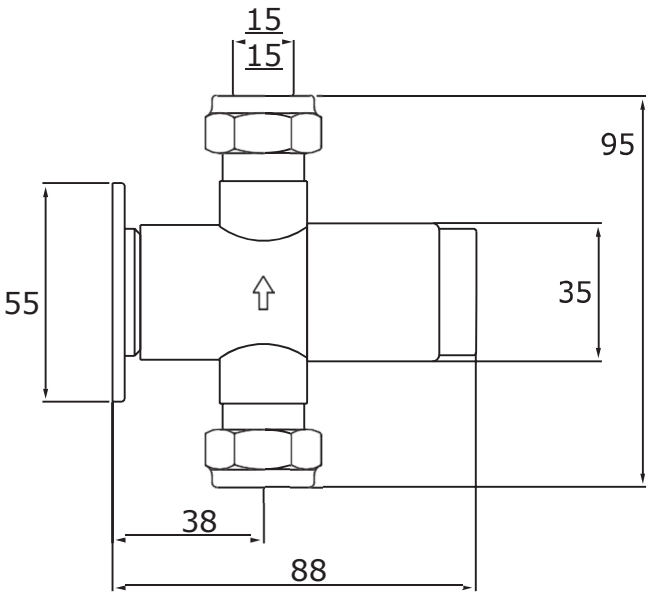

Time Flow Shower Exposed
Concealed TF992CP

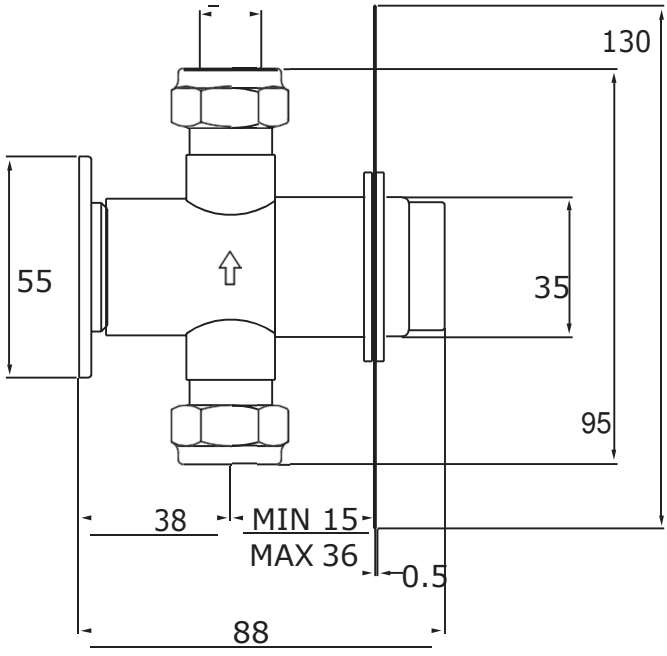

Time Flow Shower
TF997CP

37a Villa Wood Road, Dromore, Co Down. N Ireland BT25 1LG
W. spatec.co.uk e: info@spatec.co.uk t: 0044 28 92 699200 f: 0044 28 92 692745

E&OE